CHANGE 25 - PERMANENT ABOVE GROUND SWITCHGEAR HOUSE FOR POWER SUPPLY - SOUTH OF KEYINGHAM

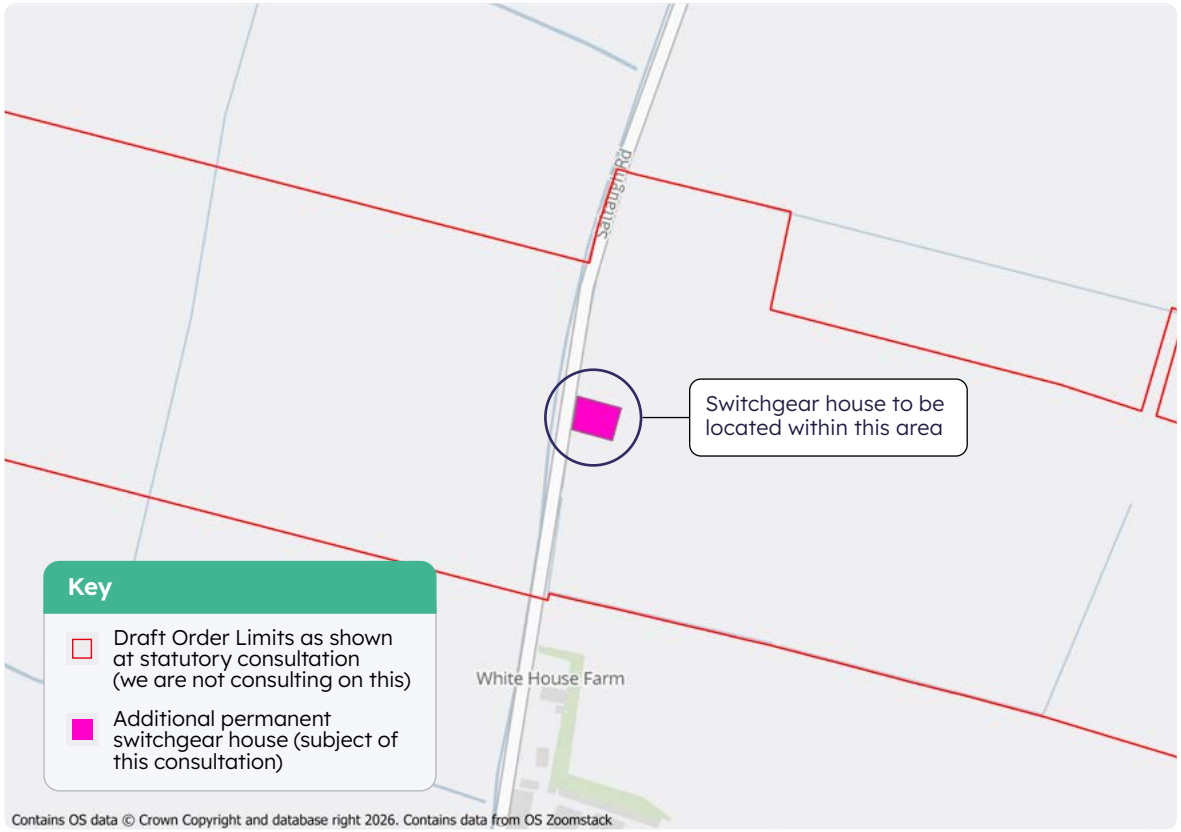

For more detailed mapping please see our interactive map on **www.nephccp.co.uk**

Location	1.5km south of Keyingham. East of Saltaugh Road / Kirncroft drain.
Local Authority	East Riding of Yorkshire
Parish	Keyingham Parish Council
Reason for change	Further technical work
Land requirement	Permanent
Size	Approx 0.01 hectares
Description of change	As described in the PEIR and at statutory consultation, the Project requires the installation of twin power cables from Salt End to Easington. These would run alongside the pipeline. A switchgear house is required south of Keyingham to enable testing, isolation, fault-finding, and operational management of the cable circuits. This land was within the draft Order Limits presented at statutory consultation, but at that stage no permanent structure or permanent land take was envisaged at this location. The switchgear house would comprise: • A shed type building of up to 4.5m x 4.5m and 4.5m high, with additional land for planting if required. • Provision of a permanent access onto Saltaugh Road and parking space. • Security fencing. The switchgear house would be unlit, unstaffed (except for very occasional inspections) and would not generate any noise. When the pipeline is decommissioned the station would be dismantled and the ground reinstated. Environmental information relating to this change can be found on **www.nephccp.co.uk**